


EDK3B



*We prepare a new version
to be launched in fall 2009.*

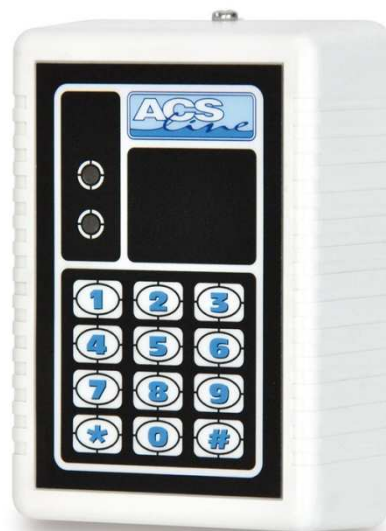


EDK3B

Both contact and contactless media readers, equipped with PIN keypad. In such systems, where higher level of security is required, it is necessary to enter 4 digit PIN code in addition to card identification.

Acoustic and optic signalling. It is mounted on any surface and wiring is handled and connected easily using a terminal board.

| Product Code | Description |
|--------------|--|
| EDK3 | Contact DALLAS Chips Reader with keypad, indoor - white |
| EDK3B | Contactless Reader with keypad, indoor - white |
| EDK3-C | Contact DALLAS Chips Reader with keypad, outdoor - black |
| EDK3B-C | Contactless Reader with keypad, outdoor - black |

TECHNICAL SPECIFICATION

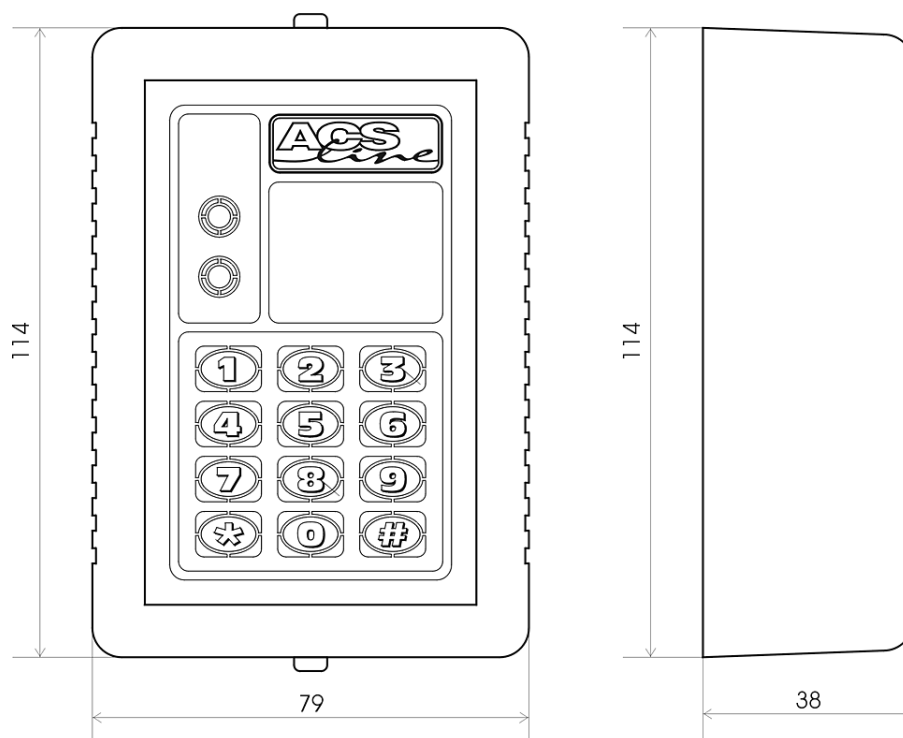

| Type designation | EDK3 | EDK3B |
|---------------------|--|-----------------|
| Power Supply | DC 10 - 15V (typ. 12V) | |
| Input Current | 30 mA (@12V DC) | 90 mA (@12V DC) |
| ID medium | DALLAS | Contactless |
| Size (h x w x d) | 80 x 115 x 40 mm | |
| Casing | IP 40 | |
| Weight | 150 g | |
| Working temperature | -20°C to +50°C | |
| Storage temperature | -40°C to +50°C | |
| Connection | 5 wire, max. 10m | |
| Data output | RS 232, Wiegand 26 | |
| Montage | Partially sunk into the wall, two mountig points | |



**ELECTRONIC
IDENTIFICATION
SYSTEM**

Producer: ESTELAR s. r. o.
Samostatnost 1181, 769 01 Holešov, Czech Republic
phone: +420 573 394 894, e-mail: sales@estelar.cz

www.acsline.com